



EGP15A THRU EGP15M


SINTERED GLASS PASSIVATED JUNCTION HIGH EFFICIENT RECTIFIER

Reverse Voltage - 50 to 1000 Volts

Forward Current - 1.5 Amperes

PATENTED

DO-204AC

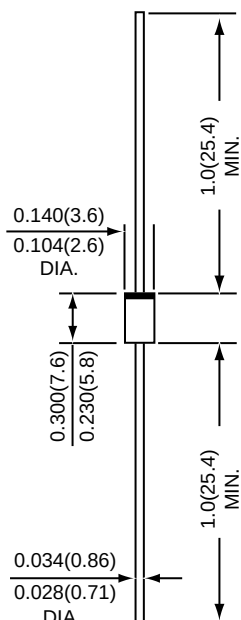

*Dimensions in inches and (millimeters)

SUPEREX II™



FEATURES

- * GPRC (Glass Passivated Rectifier Chip) inside
- * Glass passivated cavity-free junction
- * Superfast recovery time for high efficiency
- * Low forward voltage , high current capability
- * Low leakage current
- * High surge current capability
- * High temperature soldering guaranteed: 260°C/10 seconds, 0.375" (9.5mm) lead length, 5lbs. (2.3 kg) tension
- * Plastic package has Underwriters Laboratory Flammability Classification 94V-0

MECHANICAL DATA

Case : JEDEC DO-204AC molded plastic over glass body

Terminals : Plated axial leads , solderable per MIL-STD-750, Method 2026

Polarity : Color band denotes cathode end

Mounting Position : Any

Weight : 0.015 ounces , 0.4 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.	SYMBOLS	EGP15								UNITS
		A	B	D	F	G	J	K	M	
Maximum repetitive peak reverse voltage	VRRM	50	100	200	300	400	600	800	1000	Volts
Maximum RMS voltage	VRMS	35	70	140	210	280	420	560	700	Volts
Maximum DC blocking voltage	VDC	50	100	200	300	400	600	800	1000	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length (SEE FIG.1)	I (AV)	1.5								Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	IFSM	50					45			Amps
Maximum instantaneous forward voltage at 1.5 A	VF	1.0				1.25	1.7			Volts
Maximum DC reverse current TA=25°C TA=125°C at rated DC blocking voltage TA=150°C	IR	5 30 80					5 80 -			uA
Maximum reverse recovery time (NOTE 1)	trr	50					75			nS
Typical junction capacitance (NOTE 2)	CJ	35								pF
Typical thermal resistance (NOTE 3)	RθJA RθJL	40 15								°C / W
Operating junction and storage temperature range	TJ,TSTG	-65 to +175					-55 to +150			°C

NOTES : (1) Reverse recovery test condition : IF 0.5A, IR=1.0A, Irr=0.25A

(2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

(3) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead lengths, P.C.B. mounted.

RATINGS AND CHARACTERISTIC CURVES EGP15A THRU EGP15M

FIG.1 - FORWARD CURRENT DERATING CURVE

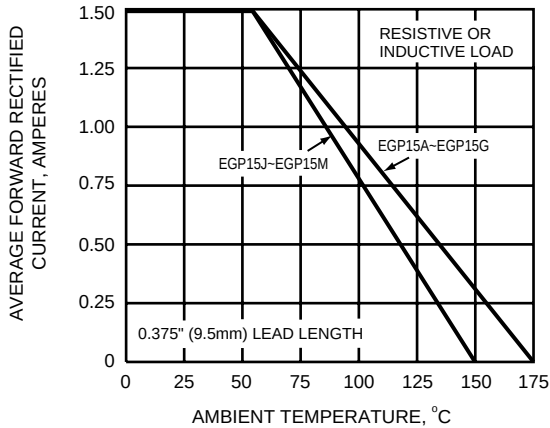


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

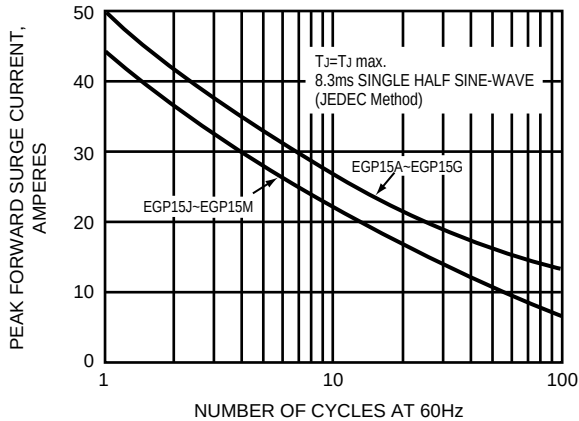


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

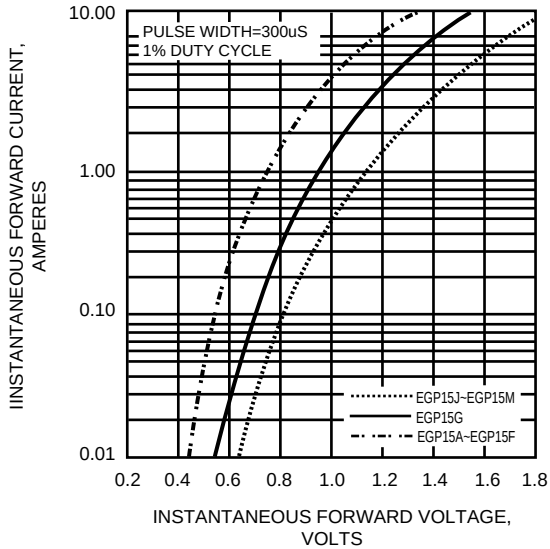


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

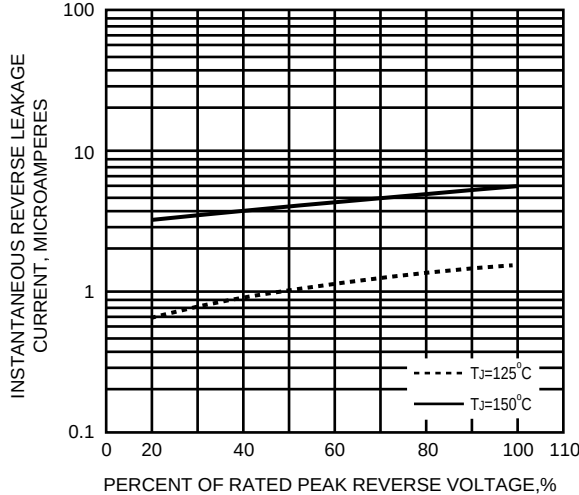


FIG.5 - TYPICAL JUNCTION CAPACITANCE


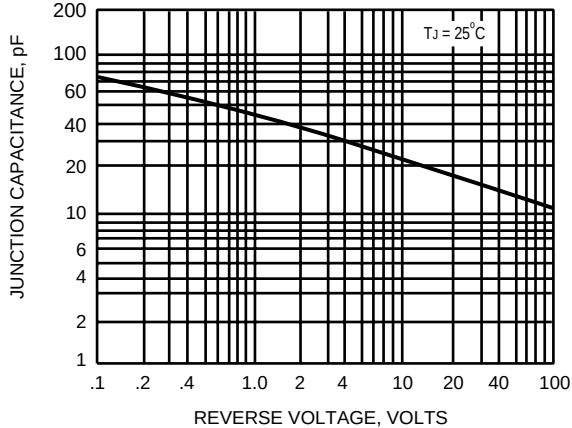


FIG.6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

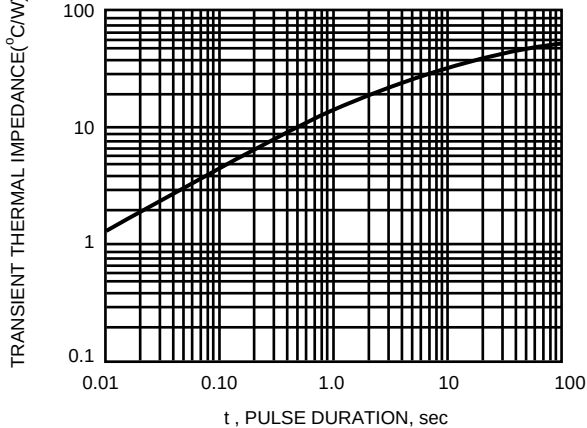

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.